



【Basic Parameters】

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)、White(RAL9003)
- IP grade: IP20
- Beam angle: 8°/15°/24°/36°/50° optional
- CCT: 2700/3000/4000/5000K optional
- CRI: 90
- SDCM(Light source): <3 Step
- Input voltage: AC220-240V
- Working temperature: -15℃~35℃
- Lighting direction: Downward
- Dimming method: Non-dimming/DALI dimming optional
- Application: Indoor
- Certification: CE、ROHS、Reach
- Warranty: 5 years

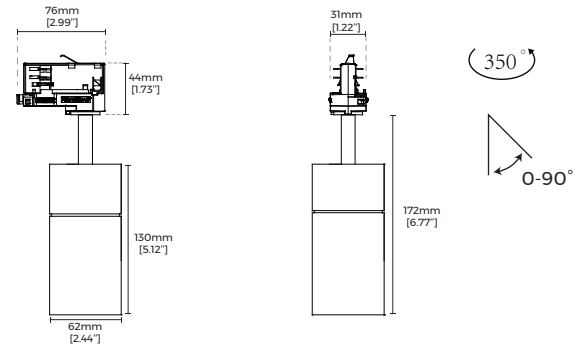

Non-dimming version
(Suitable for four-wire three-circuit guide rail)

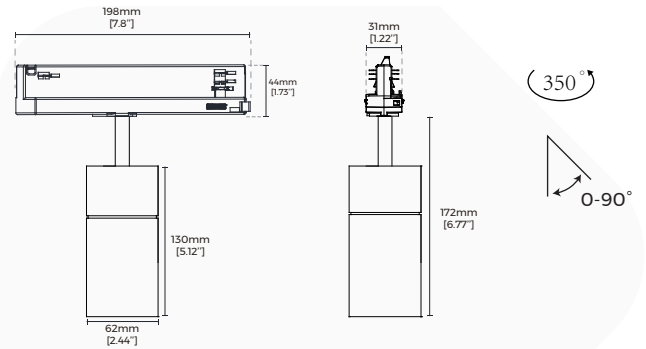

DALI dimming version
(Suitable for six-wire three-circuit guide rail)