


## 【Basic Parameters】

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size:  $\phi 62\text{mm}$  optional
- IP grade: IP20
- CCT: 2700/3000/3500/4000K optional
- CRI: 90
- SDCM: <5 Step (ANSI)
- Spotlight angle: 15°/24°/36°
- Light efficiency: 82/77/85lm/W
- Input voltage: DC48V
- Dimming method: Non / DALI-2 / Tuya Bluetooth / CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 3 years




## 【Luminaire Parameters】

Version	Model	Size	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	M20S-62	62mm [0.20ft]	48VDC	0.31 [1.55A/ft]	15.0 [75.00W/ft]	16.5 [82.50W/ft]	>90	15°	2700K	1125
									3000K	1160
									3500K	1195
									4000K	1230
								24°	2700K	1045
									3000K	1080
									3500K	1120
									4000K	1155
								36°	2700K	1165
									3000K	1200
									3500K	1240
									4000K	1275

Note:


1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

# [Optical Parameter]

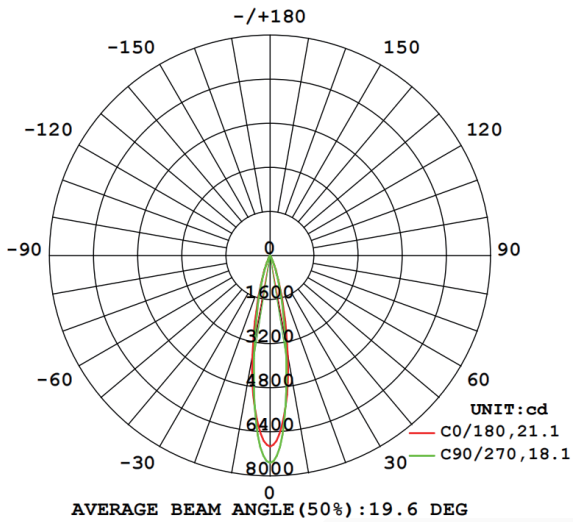


Luminous intensity distribution diagram

15°

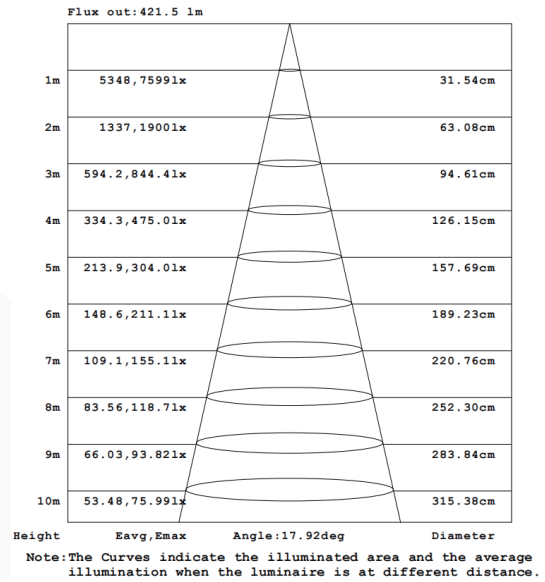


AAI Figure

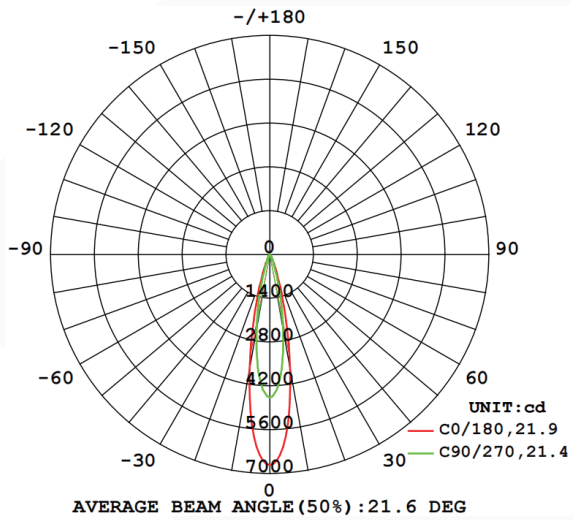


Luminous intensity distribution diagram

24°

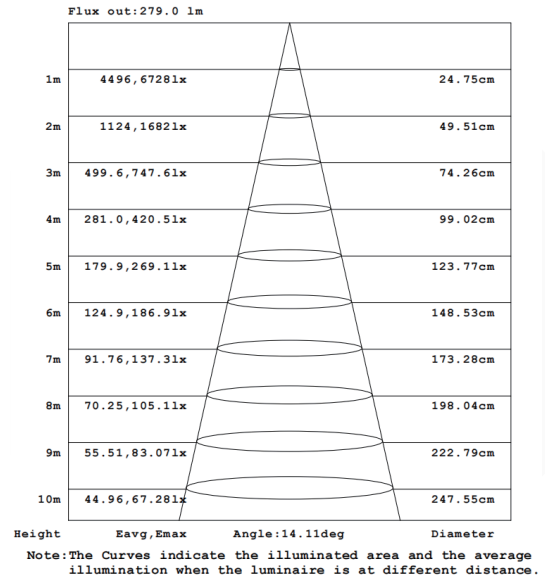


AAI Figure

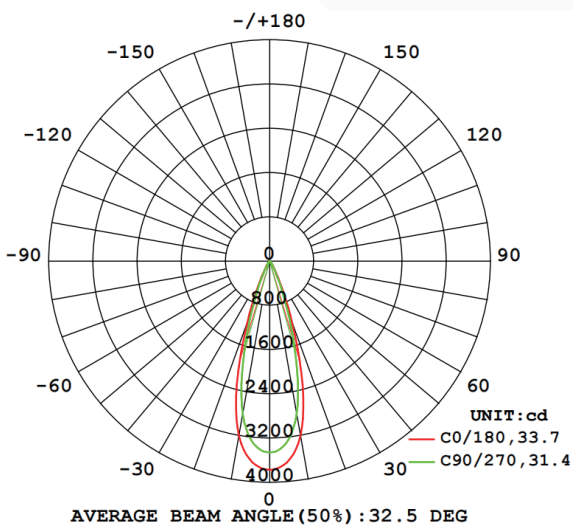

Luminous intensity distribution diagram

36°

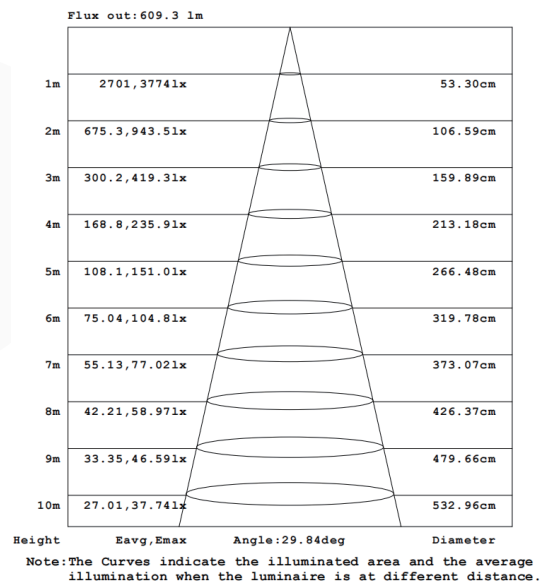

AAI Figure

**[Product mechanical data]**

