



OAK ALLOY

The owl grey hues in this 3-strip oak floor from the Harmony Collection create a peaceful expression, punctuated by naturally occurring colour variations in the timber. Each board is carefully brushed to bring out the character of the grain and highlight the texture of the timber. The matt lacquer finish eliminates glare while protecting the wood from daily wear.

PRODUCT DETAILS		PRODUCT DETAILS	
Product type / Construction	Wood Floors / 3-layer parquet	Hardness (Brinell) valu	
Article Number / EAN Code	153N0BEKD1KW240 / 7393969041751	range	
Design / Wood Species	3-strip / Oak	LRV / LRV Std1	
Surface treatment /	Matt lacquer / Stained	Warranty	
Natural/Stained		TECHNICAL PROPER	
Design features	Brushed	Moisture content	
Width x Length x Thickness	200 x 2421 x 15 mm	-	
Weight per package / per	23 kg / 7.9 kg	—— Minimun Mean Density kg/m³	
<u>m2</u>		Reaction To Fire	
Area per package / per	2.91 m ² / 130.1 m ²	Formaldehyde Emissio	
pallet		Content PCP	
Grading	Lively	Breaking Strength N/m	
Joint	Woodloc® 5S	— Thermal Conductivity	
Installation method	Floating, Glue-down	Biological Durability	
Floor heating	Yes	— CARB2	
Wear leayer material /	Hardwood / 3.5 mm		
thickness		Slip resistance	
Resandable	2-3 times	TSCA	
Core material	Pine/Spruce	CARB P2	
Backside material	Spruce	Compliant	

PRODU	JCT D	ETAI	LS

Hardness (Brinell) value /	3,7 / 2.2 - 5.9	
range		
LRV / LRV Std1	26 / 3.6	
Warranty	30 years	
TECHNICAL PROPERTIES		
Moisture content	EN13183	7%+2%

TECHNICAL FROI ERTIES		
Moisture content	EN13183	7%±2%
Minimun Mean Density		>500 kg/m³
kg/m³		
Reaction To Fire	EN13501-1	Dfl-s1
Formaldehyde Emission	EN717-1	E1
Content PCP	CEN/TR14823	≤ 5 ppm
Breaking Strength N/mm²	EN1533	NPD
Thermal Conductivity	EN12664	0,11W/mK









CEN/TS15676

EN350-2





Class 1

NPD

Compliant







DETAILED DESCRIPTION

All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood will occur.

The product includes large sound and black knots and cracks. Knots and cracks may vary in size and numbers. Brown, grey and white putty is used to fill cracks and knot holes.

Colour change: Stained product - noticable color change over time.

Packages may contain start and stop boards.


Descriptions & Imagery

www.kahrs.com | ©Kährs

Other products in this collection

OAK CREME

OAK ALE

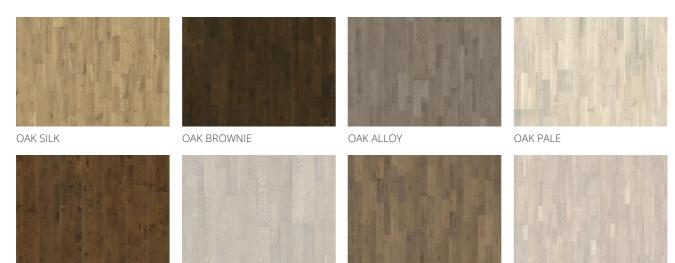

OAK GRANITE

OAK LIMESTONE