


Model: PARMA LESTONE

Codes: 100348564

Group: G-222

Format: 14,2X44X0,85CM

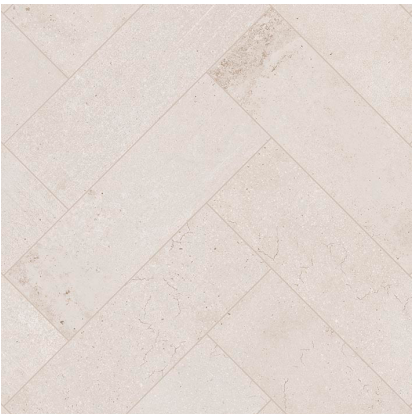

| RECOMMENDATIONS                 |                                        |  |
|---------------------------------|----------------------------------------|--|
| Recommended adhesive            | 100201526 ONE-FLEX PREMIUM BLANCO 25KG |  |
| Recommended joint               | 100236808 COLORSTUK RAPID BEIGE N 5KG  |  |
| Recommended joint (wet area)    | 100236808 COLORSTUK RAPID BEIGE N 5KG  |  |
| Recommended adhesive (wet area) | 100201526 ONE-FLEX PREMIUM BLANCO 25KG |  |

| DIMENSIONAL FEATURES        |        |                     |
|-----------------------------|--------|---------------------|
| Length and width deviation  | ±0.5%  | UNE-EN ISO 10545-2* |
| Side straightness deviation | ±0.5 % | UNE-EN ISO 10545-2* |
| Orthogonality deviation     | ±0.5%  | UNE-EN ISO 10545-2* |
| Surface flatness deviation  | ±0.5 % | UNE-EN ISO 10545-2* |

| FEATURES                                                                                                                                |                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
|  Gloss-free                                          |  Material suitable for use on shower walls.         |
|  Material suitable for use on outdoor walls.         |  Material suitable for use on indoor walls.         |
|  Material suitable for use on indoor floors.         |  There are consistent color changes between pieces. |
|  Material recommended for installation on the floor. |                                                                                                                                        |

| PHYSICAL PROPERTIES                    |           |                   |
|----------------------------------------|-----------|-------------------|
| Water absorption                       | Bla       | ISO 10545-3*      |
| Breaking strength                      | >2100 N   | >1300N*           |
| Resistance to thermal shock            | PASS      | ISO 10545-9*      |
| Crack resistance                       | PASS      | ISO 10545-11*     |
| Flammability                           | A1f I/A1  | EN 13501-1*       |
| Slip resistance (wet pendulum) irhd 55 | CL 1 (24) | EN 16165 Anexo C* |
| Slip resistance (pendulum-dry)         | 90        |                   |
| Dynamic coefficient of friction (dcof) | 0.44      |                   |
| Abrasion resistance                    | PEI 3     |                   |

| CHEMICAL PROPERTIES     |            |               |
|-------------------------|------------|---------------|
| Stain resistance        | CL 5       | ISO 10545-14* |
| Resistance to chemicals | GA/GLA/GHA | ISO 10545-13* |



| PACKING                |                  |  |
|------------------------|------------------|--|
| Sales units per box    | 0.74976 M2/BOX   |  |
| Sales units per pallet | 62.979814 M2/PAL |  |
| Sales units per unit   | 0.06248 M2/PIECE |  |
| Sale unit              | M2               |  |
| Base unit              | ST               |  |
| Net weight             | 19.238164 KG/M2  |  |
| Gross weight           | 19.606282 KG/M2  |  |

