


Model: BALI JIMBARAN MATT

Codes: 100340698

Group: G-226

Format: 14,7X14,7X0,85CM

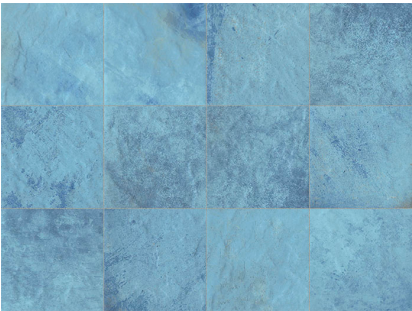

| RECOMMENDATIONS                 |                                        |  |
|---------------------------------|----------------------------------------|--|
| Recommended adhesive            | 100201526 ONE-FLEX PREMIUM BLANCO 25KG |  |
| Recommended joint               | 100236834 COLORSTUK RAPID GRIS N 5KG   |  |
| Recommended joint (wet area)    | 100182208 EPOTECH AQUA GRIS 1,5KG      |  |
| Recommended adhesive (wet area) | 100142757 SUPER-FLEX S2 15KG           |  |

| DIMENSIONAL FEATURES        |        |                     |
|-----------------------------|--------|---------------------|
| Length and width deviation  | ±0.5%  | UNE-EN ISO 10545-2* |
| Side straightness deviation | ±0.5 % | UNE-EN ISO 10545-2* |
| Orthogonality deviation     | ±0.5%  | UNE-EN ISO 10545-2* |
| Surface flatness deviation  | ±0.5 % | UNE-EN ISO 10545-2* |

| FEATURES                                                                                                                                 |                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
|  Gloss-free                                           |  Material suitable for use on pool surroundings.     |
|  Material suitable for use on shower walls.           |  Material suitable for use on outdoor walls.         |
|  Material suitable for use on indoor walls.           |  Material suitable for use on permanently wet areas. |
|  Material suitable for use on shower floors.          |  Material suitable for use on outdoor floors.        |
|  There are considerable color changes between pieces. |  Material recommended for installation on the floor. |

| ADDITIONAL NOTES                                                                                                                                                                                                                                                                                            |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| For swimming pools, follow the installation and maintenance instructions, as well as the instructions for the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications, it is necessary to waterproof the substrate, install a minimum joint of 5 mm, and install expansion joints. |  |



| PHYSICAL PROPERTIES                          |              |                   |
|----------------------------------------------|--------------|-------------------|
| Water absorption                             | Bla          | ISO 10545-3*      |
| Breaking strength                            | >1800 N      | >1300N*           |
| Resistance to thermal shock                  | PASS         | ISO 10545-9*      |
| Crack resistance                             | PASS         | ISO 10545-11*     |
| Flammability                                 | A1f I/A1     | EN 13501-1*       |
| Slip resistance (wet pendulum) irhd 55       | CL 3 (49)    | EN 16165 Anexo C* |
| Slip resistance (shod feet)                  | R10          | EN 16165 Anexo B* |
| Slip resistance (pendulum-dry)               | 98           |                   |
| Dynamic coefficient of friction (dcof)       | 0.76 (T4C1K) |                   |
| Abrasion resistance                          | PEI 4        | ISO 10545-7*      |
| Slip resistance (wet pendulum) (aus) irhd 55 | 60 (T4C1K)   |                   |
| Slip resistance (wet pendulum) (aus) irhd 96 | 59 (T4C1K)   |                   |

| CHEMICAL PROPERTIES     |            |               |
|-------------------------|------------|---------------|
| Stain resistance        | CL 5       | ISO 10545-14* |
| Resistance to chemicals | GA/GLA/GHA | ISO 10545-13* |

| PACKING                |                   |  |
|------------------------|-------------------|--|
| Sales units per box    | 0.302526 M2/BOX   |  |
| Sales units per pallet | 54.454665 M2/PAL  |  |
| Sales units per unit   | 0.021609 M2/PIECE |  |
| Sale unit              | M2                |  |
| Base unit              | ST                |  |
| Net weight             | 19.806568 KG/M2   |  |
| Gross weight           | 20.223061 KG/M2   |  |

