


## Shower Columns

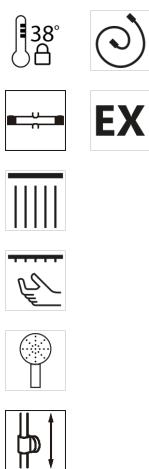

### Description

Thermostatic shower column with built-in wax thermoelement with savetouch technology, square shower head, telescopic slide rail with slider bracket and additional "JOY S" hand shower. With connections of 1/2 "and with a distance of 150±20mm between them. It includes non-return valve and safety stop at 38°C. The flow rate at 3 bar of the hand shower is 8,29l/min and of the shower head 8,45 l/min.

# TEC SQUARE

### Finish



chrome  
100220133

### Other Finishes




Matt black  
100272113

### Flow rate diagramme (±15%)

Pressure (bar)	1	2	3	4	5
HANDSHOWER L/min	4.5	6.4	7.7	8.4	8.6
FIXER SHOWER L/min	5.4	7.6	8.3	8.6	9.2

◆ HANDSHOWER L/min   ▲ FIXER SHOWER L/min

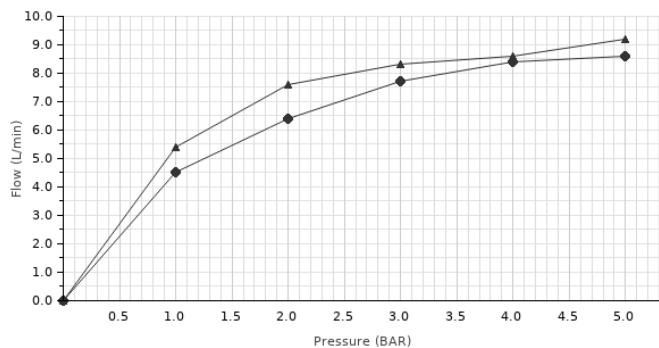

### Technical drawing



Dimensions in mm

