

AISI 304

60

NEW

**Description**

Thermostatic shower column with built-in wax thermoelement and satin stainless structure. Integrated shower head, hand shower support fixed on the column and concealed bottom outlet. 3 rain functions handshower with diverter. With 1/2" connections, it includes an anti-return valve, a safety stop at 38°, the flow rate at 3 bars of the hand shower is of 5,5 l/min, shower head 10 l/min and bottom outlet 16,3 l/min.

Finish

brushed titanium
100340898

Other Finishes

brushed copper
100343449



Matt black
100333801

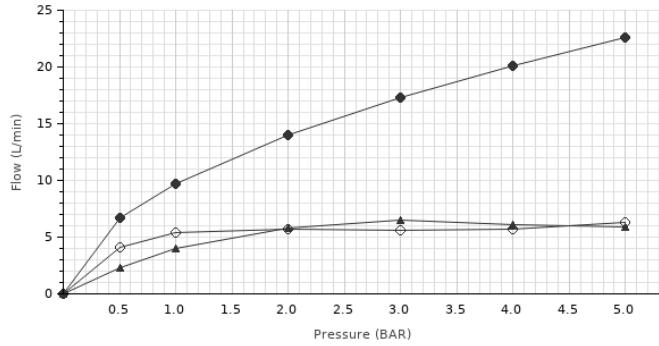


polished stainless steel
100333800

Flow rate diagramme (±15%)

Pressure (bar)	0.5	1	2	3	4	5
SPOUT L/min	6.65	9.7	14.01	17.31	20.1	22.56
HANDSHOWER L/min	2.28	3.97	5.82	6.46	6.14	5.9
RAIN L/min	4.09	5.36	5.7	5.64	5.68	6.29

◆ SPOUT L/min ▲ HANDSHOWER L/min ⇝ RAIN L/min

**Technical drawing**

Dimensions in mm

