Model: POLYNESIA OCEAN
Codes: 100354560
Group: G-111
Format: 30X30X0,6CM

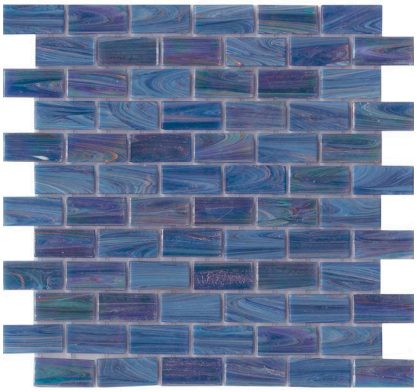

RECOMMENDATIONS

Recommended adhesive	100201526 ONE-FLEX PREMIUM BLANCO 25KG	
Recommended joint	100236463 COLORSTUK RAPID BLANCO N 5KG	
Recommended joint (wet area)	100236463 COLORSTUK RAPID BLANCO N 5KG	100086920 FILA FOB XTREME 1L
Recommended adhesive (wet area)	100217753 POLITECH PREMIUM COMPUESTO A+B 10KG	

TECHNICAL INFORMATION

Slip resistance (wet pendulum) irhd 55	CL 1 (18)	EN 16165 Anexo C*
Slip resistance (pendulum-dry)	72	
Dynamic coefficient of friction (dcof)	0.25	ANSI 137.1*
Composition	RECYCLED GLASS	

FEATURES

- Product manufactured on a mesh that makes installation easier.
- Material with surface with the ability to produce reflections.
- Material suitable for use on permanently wet areas.
- Material suitable for use on indoor floors.
- Material suitable for use on shower walls.
- Material suitable for use on outdoor walls.
- Material suitable for use on indoor walls.
- Models with this symbol need to be grouted across the whole surface.

PACKING

Sales units per square meter	11.111111 PIECES/M2	
Sales units per box	10 PIECES/BOX	
Sales units per unit	1 PIECES	
Sale unit	ST	
Base unit	ST	
Net weight	1.02 KG/PIECES	
Gross weight	1.051 KG/PIECES	

It is advisable to follow the installation and maintenance instructions published by L'ANTIC COLONIAL, S.A., observing in any case the legal or regulatory requirements that may exist for each area of use. Do not use aggressive agents, such as acids or solvents, or metallic or sharp elements for cleaning. In public places mosaics must comply with the slipperiness requirements of the Spanish Technical Building Code. This document is purely commercial and may not be used in any legal or administrative proceedings, neither as an expert opinion nor as documentary evidence, unless expressly authorized by L'ANTIC COLONIAL, S.A.